


MURPHY

Allround ® Bridging System – Station Road





Allround® Bridging System

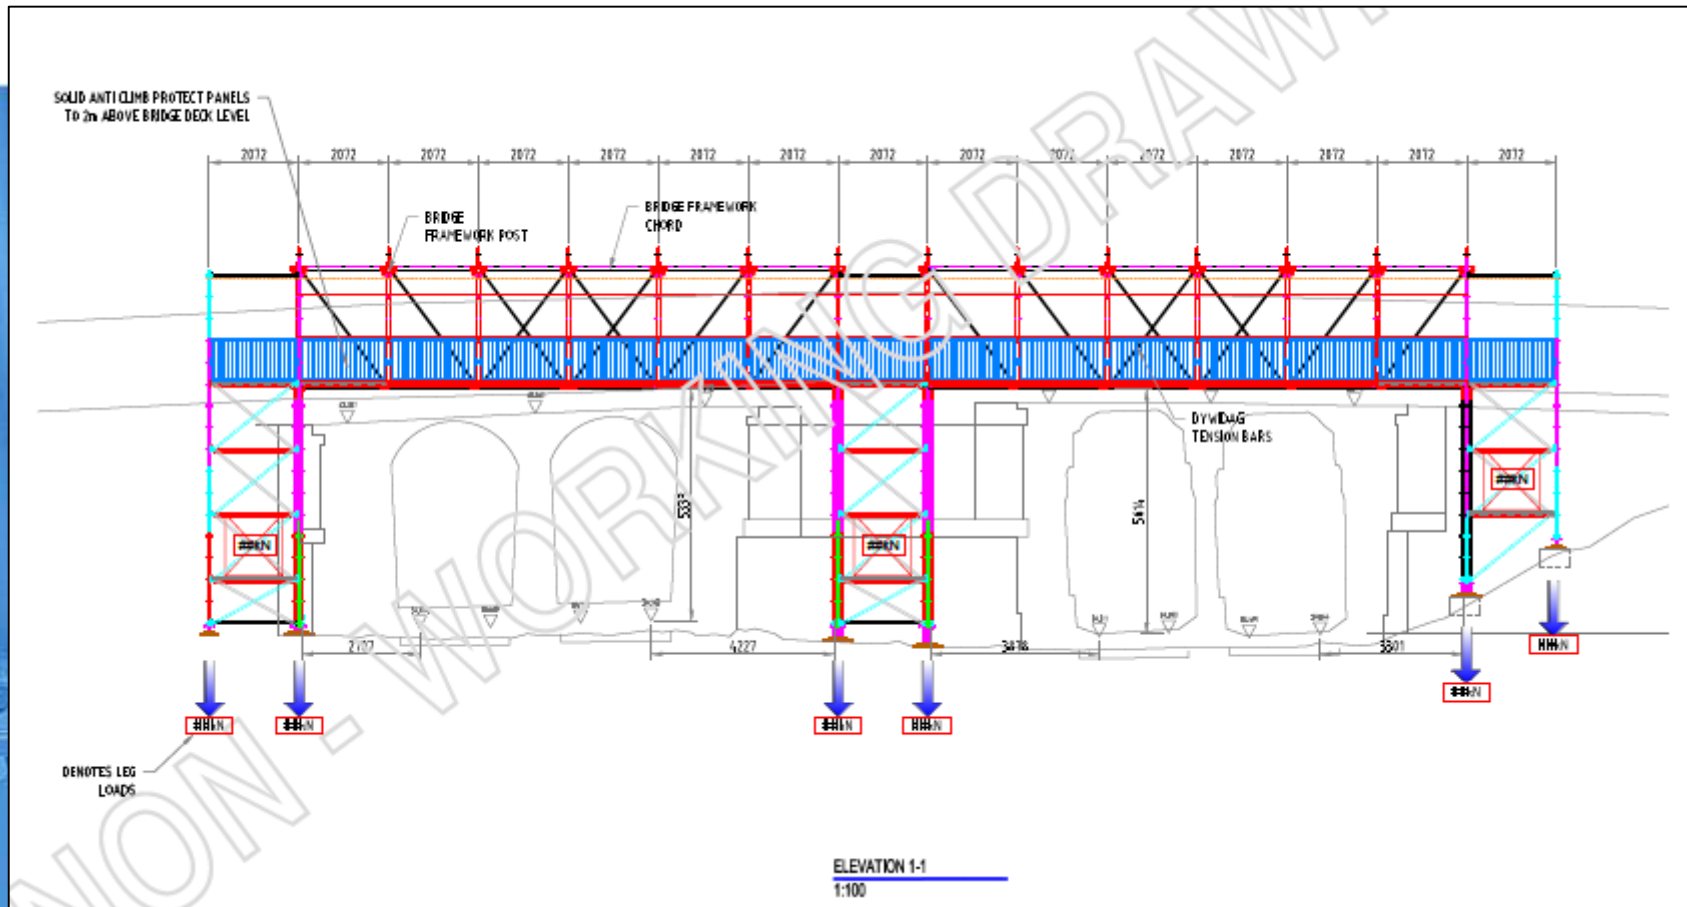



Allround® Bridging System

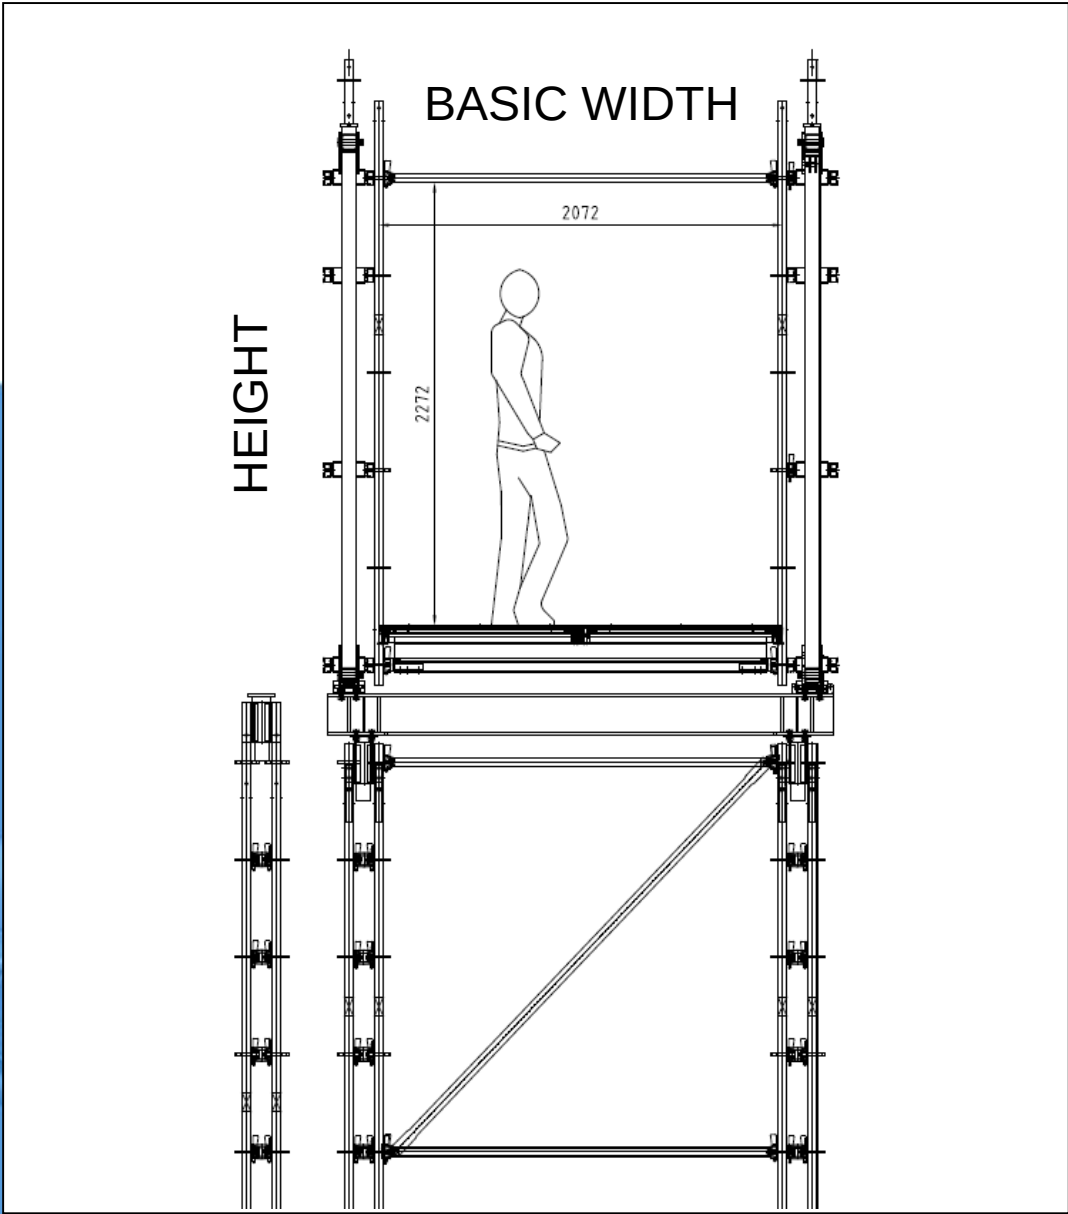

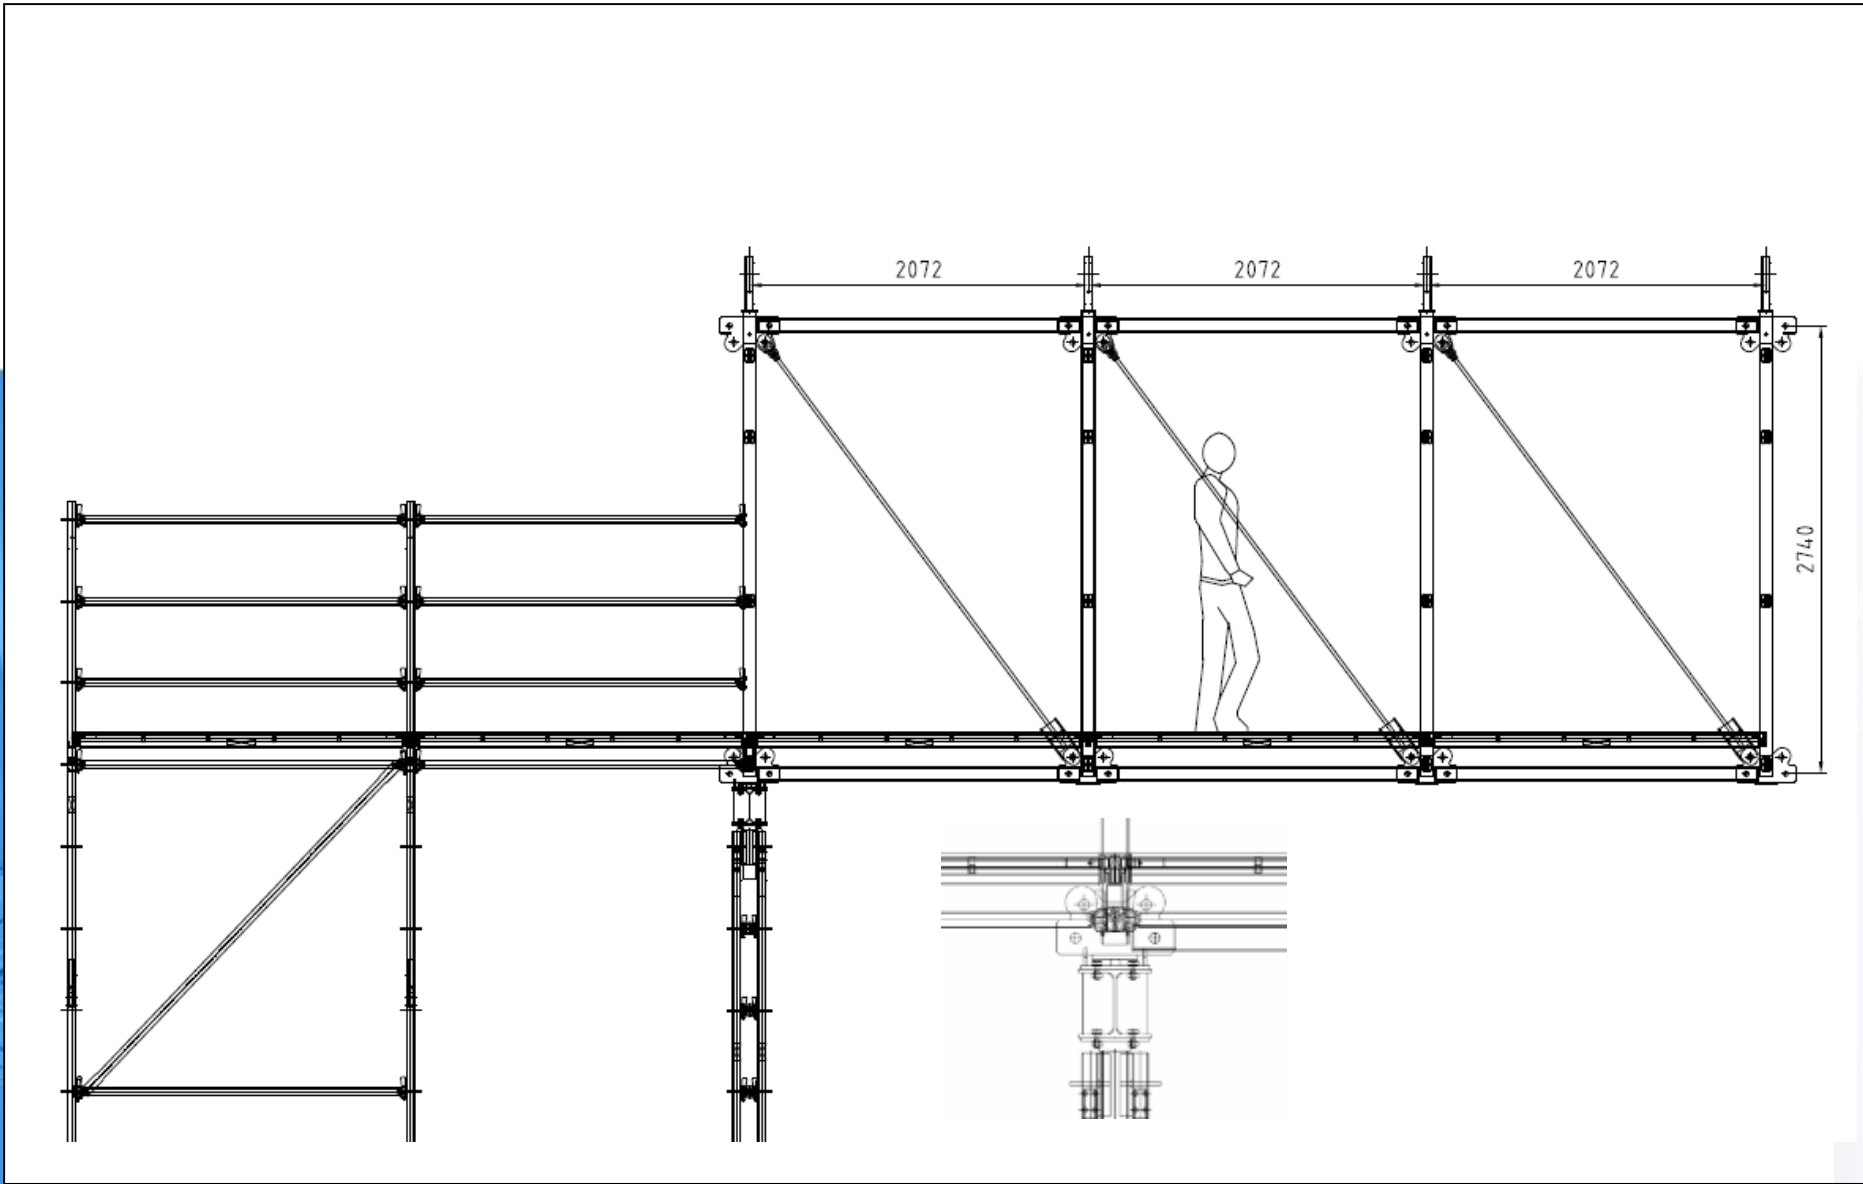

Allround® Bridging System

Example:


- grid 2.07 x 2.07 m
- EV-decks T7
- guardrail with child protection
- open bridge without Protect (no cladding)

Max. spans:

The max. span resulting from the load bearing capacity of the truss system without regard to cross-bracing or dynamic effects:

- live-load 1,90 kN/m² ⇒ up to 33 m
- live-load 3,50 kN/m² ⇒ up to 27 m
- live-load 5,00 kN/m² ⇒ up to 23 m
- live-load 7,50 kN/m² ⇒ up to 18 m

weight appr. 225 kg/m

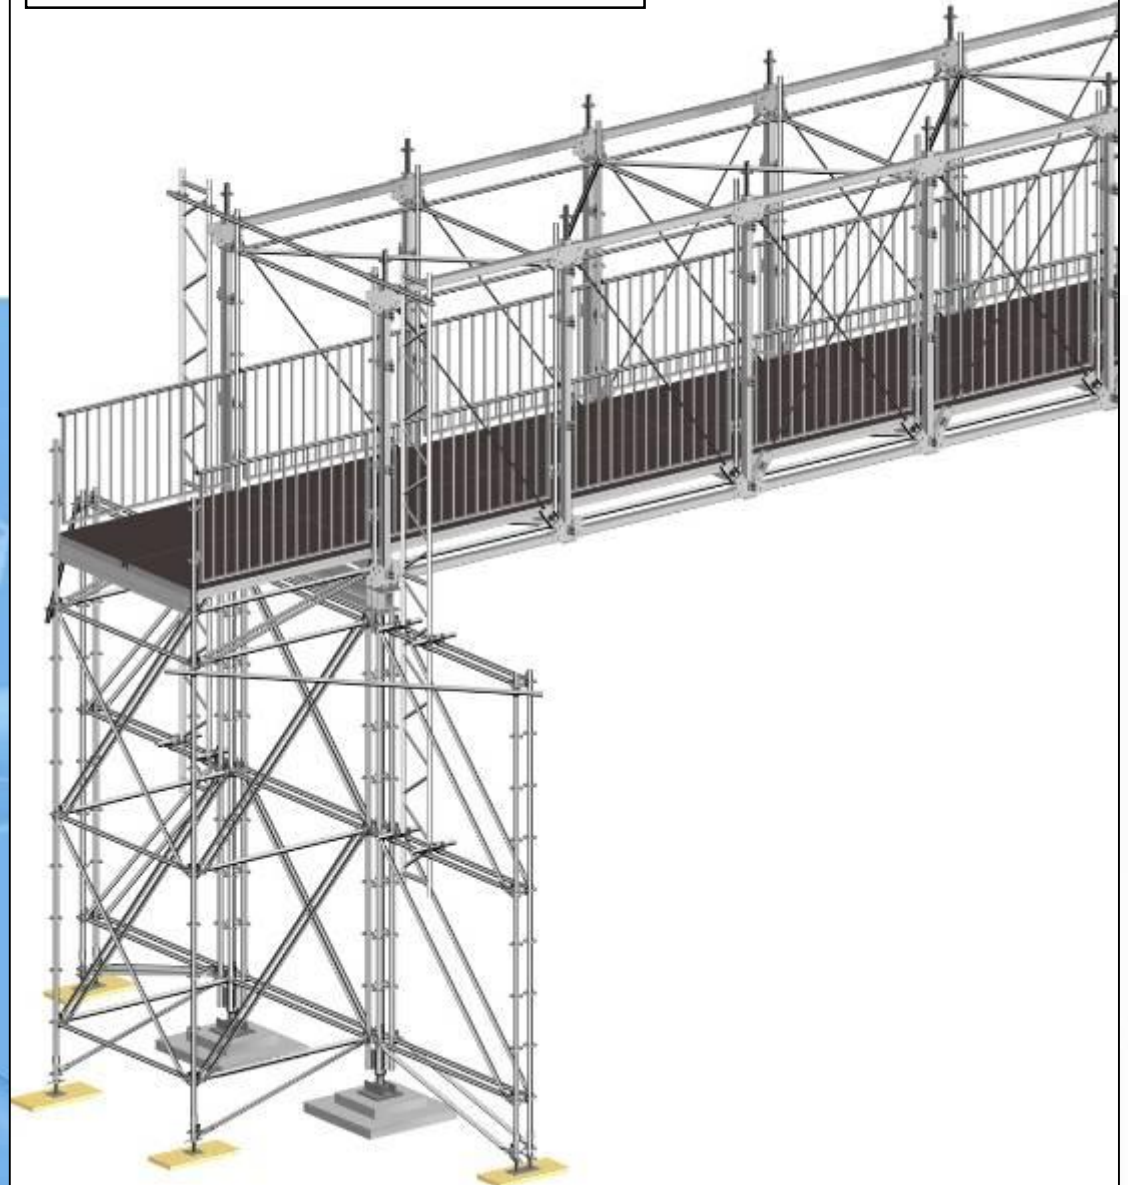

Protec and Buffalo Board Internal Finish



Insitu Build Example on Road.



CROSSWAY
Scaffolding (Elland) Ltd

